

# Honda EG5500 5.5KW Digital AVR Petrol Generator

Prod Code: 5000-HOND2-61

The highest output EG generator in the range delivers a maximum output of 5.5kW, with the power stability required for today's equipment. For tasks such as powering tools and incandescent lamps simultaneously, the new Digital AVR delivers smoother power with greatly reduced risk of light flicker or damage to sensitive electronics. Simple yet rugged design features also make the EG5500 easy to use, with centralised controls and outlets, full tubular frame and a large fuel tank


## SPECIFICATIONS

Fuel type	Unleaded petrol
Primary usage	Professional Use
Type	Open Frame
Max output (W)	5500
Output voltage (V)	115/230V
Rated output (W)	5000
Frequency rating (Hz)	50
DC voltage	N/A
Power Stability	Digital AVR Output®
DC current	N/A
Engine type	GX390
Type	single cylinder 4-stroke OHV air cooled
Oil capacity	1.1 litre with Oil Alert®
Starter system	recoil
Length (mm)	681
Width (mm)	530
Height (mm)	570
Dry weight (kg)	83
Noise Level (1/4 load) (dB(a)*)	85
Run Time at Rated Load	8h10min
Fuel tank capacity (litres)	24
Petrol Consumption	2.95 L/H
Options	Wheel Kit



EG4500 / EG5500

EG4500CL, EG5500CL: BT type

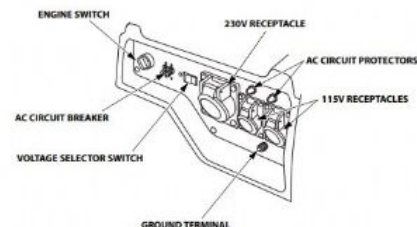

[www.geargb.co.uk](http://www.geargb.co.uk)  
01429 269757