



www.geargb.co.uk

OPTIONAL PARTS

REMOTE CONTROL KIT


Using the remote control in wet conditions, such as rain or snow, or near a pool or sprinkler system, or when your hands are wet, could result in malfunction. Keep the remote control dry. (degree of protection: IP3X)



1. Remove the battery maintenance cover (see page 63).

2. Remove the plug from the connector.

- Do not discard the plug. The plug should be installed back into the connector when the remote control kit is removed.





3. View the back of the battery maintenance cover and locate the knockout near the top center of the cover. Carefully remove the knockout.


Operator Instruction Remote Control

KNOCKOUT


BATTERY MAINTENANCE COVER




4. Fit the grommet into the battery maintenance cover knockout.
5. Plug the remote control cable into the connector.
6. Install the battery maintenance cover and tighten the cover screw.

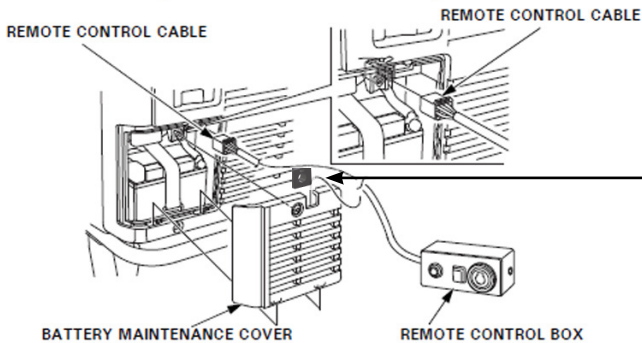

7. To avoid accidentally unplugging the remote control cable, secure the cable to the generator frame with a cable tie as shown.

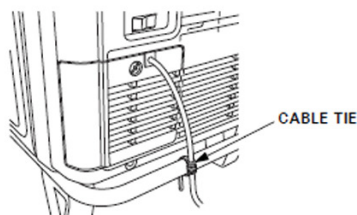

- Never operate the generator with the battery maintenance cover open, as poor engine and generator performance will result.
- Install the plug to the connector when the remote control kit is removed.



White Hart Court
Hart Village
Hartlepool
Cleveland
TS27 3AW

0200-GEN-24336