

Honda GX240 QXQ4 1 INCH Keyway Shaft Engine

Prod Code: 3000-HOND-8QXQ4

1" (25.4mm) Keyway Shaft Oil Alert Petrol Engine.


The GX240 engine is suitable for a wide range of heavy duty applications such as in construction equipment, tillers, generators, welders, pumps and other industrial applications.

Engine features:

- OHV design enhances combustion efficiency
- High power-to-displacement ratio
- Easy starting with an automatic decompression system and an easy-to-grip soft recoil starter handle
- High quality materials and purpose-built components which ensure reliable, long-term use
- Meets world's most stringent environmental legislation
- Low fuel and oil consumption
- Reduced vibration and noise levels

SPECIFICATIONS

Engine Type	Single cylinder OHV 4-stroke air-cooled
Max. Net Torque (Nm) @ 2'500 rpm	18.3
Displacement (cc)	270
Cylinder	Cast Iron Sleeve
Bore (mm)	77.0
Stroke (mm)	58.0
Fuel Tank Capacity (l)	5.3
Oil Capacity (l)	1.1
Dry Weight (kg)	25.8
Dimensions Length (mm)	381
Dimensions Width (mm)	428
Dimensions Height (mm)	422
Recoil Start	Yes
Electric Start	No

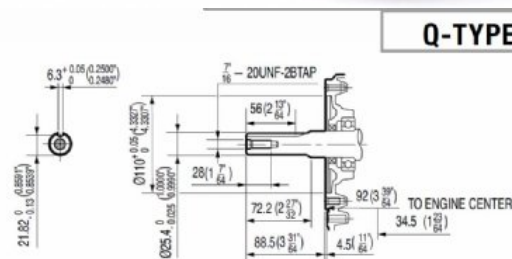

Q-TYPE

TO ENGINE CENTER

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500)

56 (2.165)

7/16 - 20UNF-2B TAP

4.5 (0.177)

34.5 (1.358)

88.5 (3.5)

72.2 (2.84)

28 (1.1)

0.110 (0.0043)

0.025 (0.0009)

21.62 (0.8511)

6.3 (0.2500