

Sincro EK2 MCT 6KVA Alternator (j609b)

Prod Code: 5010-SINC2-22167

Sincro 2-Pole Synchronous Self-Regulated Brushless Generator Alternator.


- Protection: IP23
- Standard Voltage: 115/230V - 50Hz

This unit is designed to be fitted to an engine of 10hp or above with a 7/8 inch taper shaft (j609b coupling). Check the attached technical drawing 'Taper Shaft Drawings' to match against your existing coupling. If a different coupling is required, please contact us for availability. This alternator can also be run via a belt a pulley with a bearing kit.

Engines that will fit to this alternator
Petrol. Honda GX390 / Briggs & Stratton XR2100 series
Diesel. Yanmar L100 / Lombardini 15LD 440 / Hatz 1B40

SPECIFICATIONS


Phase	Single
RPM	3000
Voltage Outputs	115/230
Frequency	50Hz
Power Output	6kw
Dimensions (L x W x H)	43 x 19 x 34cm
Weight	26kg
Taper Fitting	7/8" (j609b)
Capacitor Size	35UF

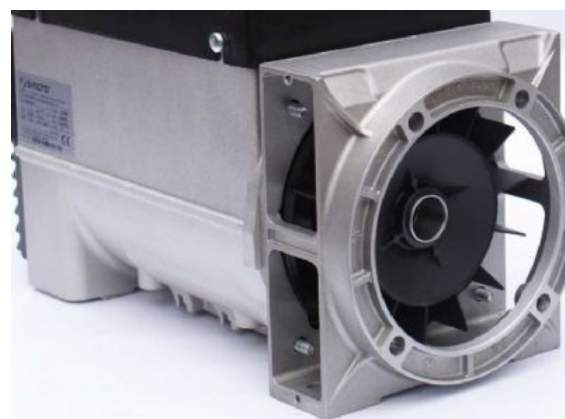

forma costruttiva / shape (M 525 - 3000)

mm	cm	mm	cm
22.14	22.34	81	32
25.4	25.4	63.5	40.5
33	33	30	12

pinna Schukko / Schuko sockets 30
pinna CEE / CEE sockets 47



V-TYPE

