

Sincro EK2 LCA 8KVA AVR Controlled Dual Voltage Alternator

Prod Code: 5010-SINC2-248

Sincro 2-Pole Synchronous Brushes Generator Alternator with Electronic Voltage Regulation (AVR).

AVR

Electronic equipment could fail if the electricity quality is not high enough. High quality smooth power is achieved with AVR technology maintaining a constant output voltage, compensating for fluctuations when the equipment starts up or the load changes. This helps provide a stable power source vital for running sensitive electronic devices safely.

- Protection: IP23
- Standard Voltage: 115/230V - 50Hz
- Voltage Accuracy 32%


This unit is designed to be fitted to a petrol engine of at least 14 HP or a diesel engine of at least 12hp with a 7/8 inch taper shaft.

Petrol eg. Briggs & Stratton XR2100 series

Diesel eg. Lombardini 15LD 500 / Hatz 1B50

SPECIFICATIONS

Phase	Single
RPM	3000
Voltage Outputs	115/230
Frequency	50Hz
Power Output	8kw AVR (Automatic Voltage Regulator)
Dimensions (L x W x H)	49 x 19 x 34cm
Weight	36kg
Taper Fitting	7/8"

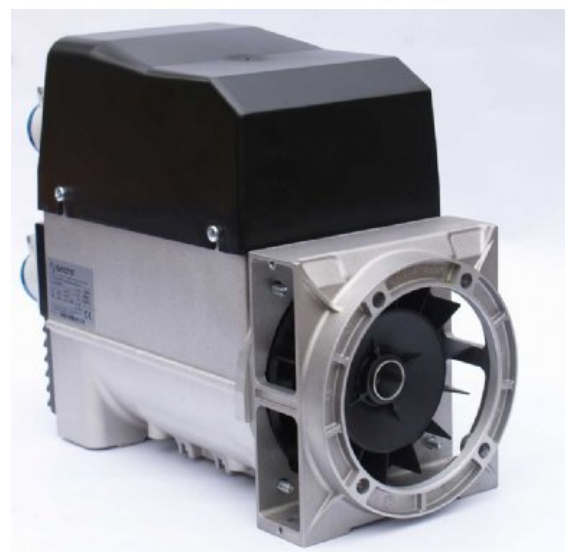

forma costruttiva / shape IM B35 - 3000

mm	mm	mm	mm
22,14	22,14	81	32
25,4	25,4	81,5	40,5
35	35	30	72

pinza Schuko / Schuko sockets 35
pinza CEE / CEE sockets 47

